


# 8ft Diameter HOLDING Tanks

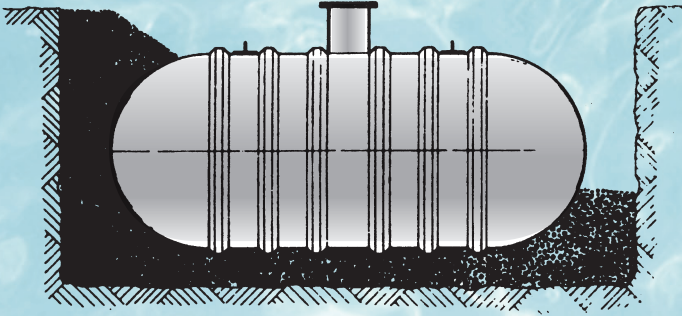

Equinox 8' diameter (2440 mm) tanks provide large volume capacities. 8' diameter tanks are designed and built to support up to 7' of over burden. All are buriable to 7' depth (2135 mm) from the top of the tank, and are provided with lifting lugs. Holding, Trickle, and Pump-Out tanks are provided with 4" (102 mm) ABS pipe inlets. For water storage tanks, specify sizes of vents, fill and outlet openings. All tanks come complete with a 24" (610 mm) diameter lid and 12" (305mm) bonded sleeve. A 24" (610) diameter sleeve is available, at an additional cost. Tanks are also available for special applications. Compartment dividers are available at an additional cost. Please contact factory for details.

## COMMERCIAL TANKS

## 8-Foot Diameter Burial HOLDING Tanks

TANK SPECIFICATIONS				
MODEL	TANK LENGTH	APPROXIMATE SHIPPING SIZE	NOMINAL CAPACITY OF TANK	RETENTION CAPACITY OF WORKING CHAMBER
G-3000-H8	148 (3760)	102 x 148 (2576 x 3760)	3000 (13640)	3000 (13640)
G-4000-H8	186 (4740)	102 x 186 (2576 x 4740)	4000 (18160)	4000 (18160)
G-5000-H8	226 (5740)	102 x 226 (2576 x 5740)	5000 (22700)	5000 (22700)
G-6000-H8	264 (6706)	102 x 264 (2576 x 6706)	6000 (27240)	6000 (27240)
G-7000-H8	297 (7543)	102 x 297 (2576 x 7543)	7000 (31780)	7000 (31780)
G-8000-H8	341 (8660)	102 x 341 (2576 x 8660)	8000 (36320)	8000 (36320)
G-10000-H8	420 (10668)	102 x 420 (2576 x 10668)	10000 (45400)	10000 (45400)

MANHOLE SLEEVES	
LENGTH	SLEEVE REQUIRED
12 (305)	1 x E-MES-12
18 (457)	1 x E-MES-18
24 (610)	1 x E-MES-24
30 (762)	1 x E-MES-30
60 (1524)	1 x E-MES-60
84 (2134)	1 x E-MES-84

